


Rohre® Aluminium

Coral Classic

PRODUCT SECTION — 1:1 (MM)

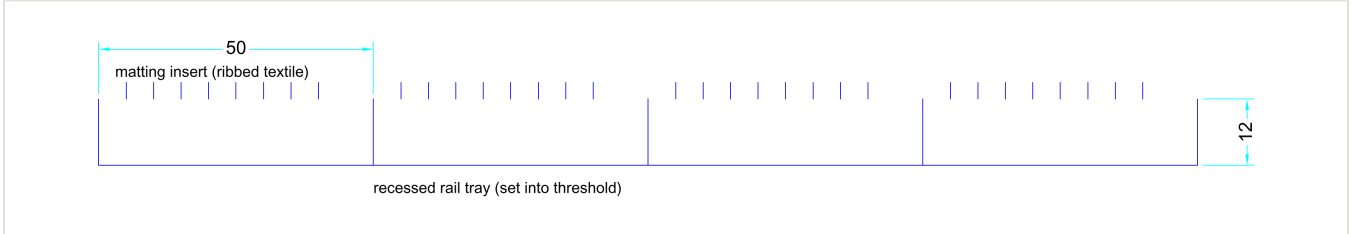

SPECIFICATION

Material	Anodised aluminium carrier with Coral entrance-matting insert
Slip resistance	P5 (wet pendulum) to AS 4586
Luminance contrast	Requirement 30% (AS 1428.1)
Fire	Insert (Coral Classic): Critical Radiant Flux 5.7 kW/m ² , Smoke Development 194% (AS ISO 9239.1). Metal carrier non-combustible.
Substrates	Recessed entry / threshold (set into a matwell tray)
Warranty	10 years
Variants	Brass & aluminium carriers · Coral Brush / Classic / Oasis inserts

Drawing: Rohre Aluminium Coral Classic — product section | **Scale:** 1:1 | **Units:** mm | **Rev:** A | **Issued:** 2026-06-13

Dimensions per Korb PDS (2026). Editable CAD file supplied: **Rohre_Aluminium_Classic_Section.dxf** (opens in AutoCAD / Revit / ArchiCAD).

Profile radii indicative; stated dimensions exact. Fix strictly to Korb installation instructions.

National (Head Office)

T 1300 00 KORB (5672)
E info@korb.au

Melbourne

17 Anderson Road,
Thornbury VIC 3071
T +61 3 8506 01
E melbourne@korb.au

Adelaide

71 Maria Street, Thebarton
SA 5031
T +61 8 7081 9811
E adelaide@korb.au

Perth

U4/4 McNeece Place,
O'Connor WA 6163
T +61 8 6119 3795
E perth@korb.au

Korb Pty Ltd

ABN 26 159 533 454