


Venturi® Polymer

Surface Mounted

PRODUCT SECTION — 1:1 (MM)

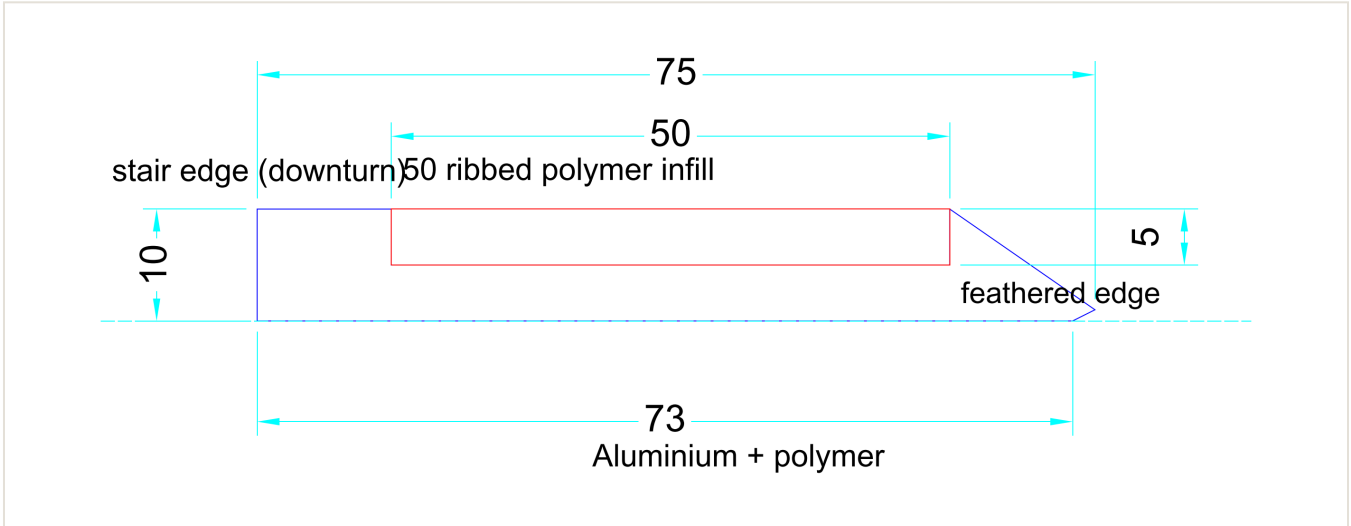

SPECIFICATION

Material	Aluminium carrier with Australian-made UV-stable polymer insert
Slip resistance	P5 (corrugated / Carbtech) · P4 (striped) — wet pendulum AS 4586
Luminance contrast	Requirement 30% (AS 1428.1)
Fire	Aluminium carrier considered non-combustible; the polymer insert is a minor surface component.
Substrates	Stone / ceramic / concrete / masonry / timber / vinyl (tile & carpet variants available)
Warranty	5 years
Variants	Surface Mounted · Surface Mounted (L) · Recessed · Flooring Tile · Carpet with Underlay

Drawing: Venturi Polymer Surface Mounted — product section | **Scale:** 1:1 | **Units:** mm | **Rev:** A | **Issued:** 2026-06-13

Dimensions per Korb PDS (2026). Editable CAD file supplied: **Venturi_Polymer_Section.dxf** (opens in AutoCAD / Revit / ArchiCAD). Profile radii indicative; stated dimensions exact. Fix strictly to Korb installation instructions.

National (Head Office)

T 1300 00 KORB (5672)
E info@korb.au

Melbourne

17 Anderson Road,
Thornbury VIC 3071
T +61 3 8506 01
E melbourne@korb.au

Adelaide

71 Maria Street, Thebarton
SA 5031
T +61 8 7081 9811
E adelaide@korb.au

Perth

U4/4 McNeece Place,
O'Connor WA 6163
T +61 8 6119 3795
E perth@korb.au

Korb Pty Ltd

ABN 26 159 533 454