

Kahn® Modular

Discrete Directional


The Kahn Modular Discrete Directional is a discrete-type modular tactile ground surface indicator (TGSI) paver manufactured from granite and bluestone, with TGSI dimensions to AS 1428.4.1. It achieves a P5 slip resistance classification to AS 4586 and is available in ivory tactile on bluestone to meet the luminance contrast requirements of AS 1428.1. Other profiles are available within the Kahn Modular range

COMPLIES WITH AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT



PROFILE & DIMENSIONS (MM)

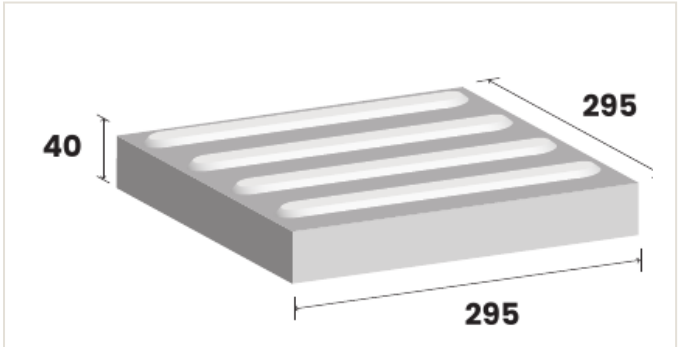

P5

Wet pendulum slip (AS 4586)

45%

Luminance contrast requirement (AS 1428.1)

10 yr

Product warranty

Granite

Bluestone paver

SPECIFICATION

Material	Granite and bluestone paver
Tactile Colour	Ivory
Tile Colour	Bluestone
Thickness	40 mm
Tile size	295 x 295 mm
Slip resistance	P5
Luminance contrast requirement	45%
Substrates	Stone Ceramic Asphalt
Warranty	10 Years

FINISHES & LUMINANCE (LRV)

TACTILE COLOUR	TILE COLOUR	CODE	DRY LRV	WET LRV
Ivory	Bluestone	131224	40.55	25.00

SPECIFY IT

Specify: Korb Kahn Modular Discrete Directional TGSI paver; granite and bluestone, ivory tactile on bluestone tile, 295 x 295 x 40 mm; slip resistance P5 to AS 4586; luminance contrast to AS 1428.1 (45% requirement); fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-KAHN_MODULAR_DISCRETE_DIRECTIONAL
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 23640.1 / 23640.2.