


Kahn® Porcelain

Integrated Directional


The Kahn Porcelain Integrated Directional tactile indicator is an 8mm UV stable porcelain tile that functions as an integrated tactile ground surface indicator, available in four colours for internal and external use. It is classified P5 for slip resistance to AS 4586, with luminance contrast to AS 1428.1, and its dimensions and discriminability comply with AS 1428.4.1. The porcelain construction is durable and supplied with a 10 year warranty when installed in accordance with the manufacturer's instructions; other profiles are available across the Kahn Porcelain range

COMPLIES WITH AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

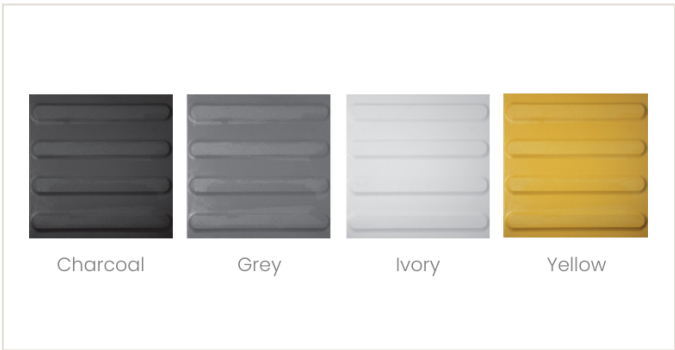

PROFILE & DIMENSIONS (MM)

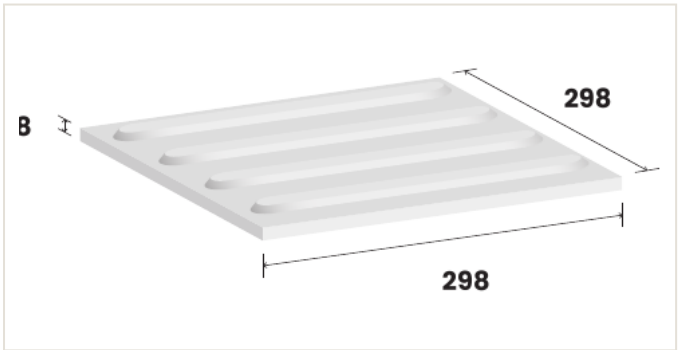

P5

Wet pendulum slip (AS 4586)

30%

Luminance contrast requirement (AS 1428.1)

10 yr

Product warranty

Porcelain

UV-stable tile

SPECIFICATION

Material	UV stable porcelain
Profile	Integrated Directional
Tile size	298 x 298 x 8 mm
Slip resistance	P5
Luminance contrast requirement	30%
Substrates	Stone Ceramic Concrete Asphalt
Warranty	10 years

FINISHES & LUMINANCE (LRV)

TACTILE COLOUR	CODE	DRY LRV	WET LRV
Charcoal	133021	12.23	11.74
Grey	133023	27.24	26.70
Ivory	133024	52.76	51.70
Yellow	133028	37.46	37.09

SPECIFY IT

Specify: Korb Kahn Porcelain Integrated Directional TGSI; UV stable porcelain tile, 298 x 298 x 8 mm; directional profile; slip resistance P5 to AS 4586; luminance contrast ≥ 30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-KAHN_PORCELAIN_INTEGRATED_DIRECTIONAL
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 12911.1 / 12911.2.