

Kahn® Solid Carved

Integrated Directional


The Kahn Solid Carved Integrated Directional is an integrated TGSI: a carved granite stone paver with tactile indicators formed into the unit, available in ivory and black granite. The granite surface achieves a P5 slip-resistance classification to AS 4586, and tactile dimensions conform to AS 1428.4.1. Supplied to suit 20mm and 40mm paved areas; pair tones to meet the luminance contrast required under AS 1428.1

COMPLIES WITH AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT



PROFILE & DIMENSIONS (MM)

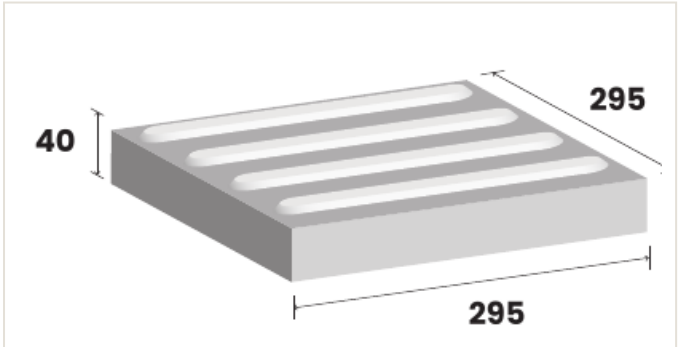

P5
Wet pendulum slip (AS 4586)

30%
Luminance contrast requirement (AS 1428.1)

10 yr
Product warranty

Granite
Carved stone paver

SPECIFICATION

Material	Carved granite stone paver
Profile	Integrated Directional
Tactile colour	Ivory
Slip resistance	P5
Luminance contrast requirement	30%
Paver depth	20mm or 40mm
Substrates	Stone Ceramic Asphalt
Warranty	10 Years

FINISHES & LUMINANCE (LRV)

TACTILE COLOUR	20 MM CODE	40 MM CODE	DRY LRV	WET LRV
Black	132121	132221	12.44	6.97
Ivory	132124	132224	40.55	25.00

SPECIFY IT

Specify: Korb Kahn Solid Carved Integrated Directional TGSI; carved granite stone paver (20mm or 40mm); slip resistance P5 to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-KAHN_SOLID_CARVED_INTEGRATED_DIRECTIONAL

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 23640.1 / 23640.2.