


Nouvel® Classic

Discrete Directional


The Nouvel Classic Discrete Directional is a machined discrete directional tactile ground surface indicator available in 316 stainless steel, Black PVD stainless steel, or brass, classified P5 to AS 4586 and dimensioned to AS 1428.4.1. The 316 stainless construction provides inherent corrosion resistance for internal and external use; the tactile finish is selected to achieve the luminance contrast required by AS 1428.1

COMPLIES WITH AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

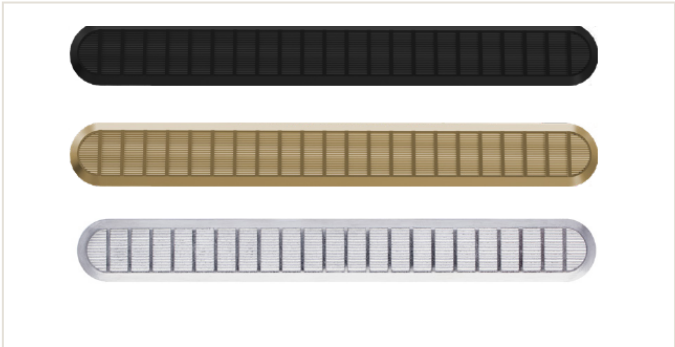

PROFILE & DIMENSIONS (MM)

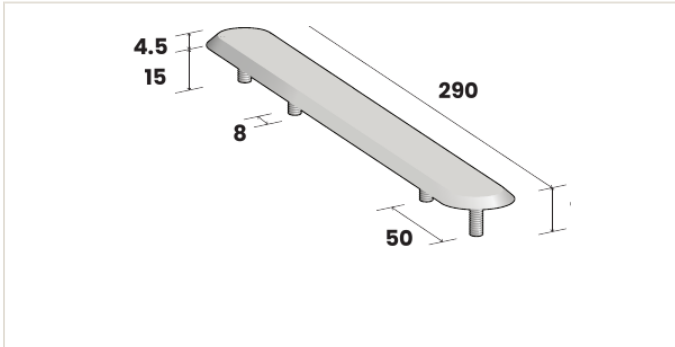

P5

Wet pendulum slip (AS 4586)

45%

Luminance contrast requirement

10 yr

Product warranty

Infix

Installation method

SPECIFICATION

Material	316 stainless steel Black PVD stainless steel Brass
Installation method	Infix
Slip resistance	P5
Luminance contrast requirement	45%
Directional bar length	290 mm
Substrates	Stone Ceramic Concrete Masonry Timber Vinyl Asphalt Exposed aggregate Carpet tile
Warranty	10 Years

FINISHES & LUMINANCE (LRV)

TACTILE COLOUR	CODE	DRY LRV	WET LRV
Black PVD	111121	5.38	4.77
Brass	111122	56.60	51.06
Stainless Steel	111123	53.97	50.11

SPECIFY IT

Specify: Korb Nouvel Classic Discrete Directional TGSi; 316 stainless steel / black PVD stainless steel / brass; infix installation; slip resistance P5 to AS 4586; luminance contrast ≥ 45% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-NOUVEL_CLASSIC_DISCRETE_DIRECTIONAL

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 14314.5 / 14314.4.