


# Renzo® Classic

## Discrete Directional


The Renzo Classic Discrete Directional is a discrete-type tactile ground surface indicator fixed by interference-fit anchor, a mechanical fixing that resists rotation and removal and suits drill-fixed installation across common hard substrates. It achieves a P5 slip resistance classification to AS 4586, dimensioned to AS 1428.4.1, with luminance contrast to AS 1428.1. Other profiles are available across the Renzo Classic range

**COMPLIES WITH** AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

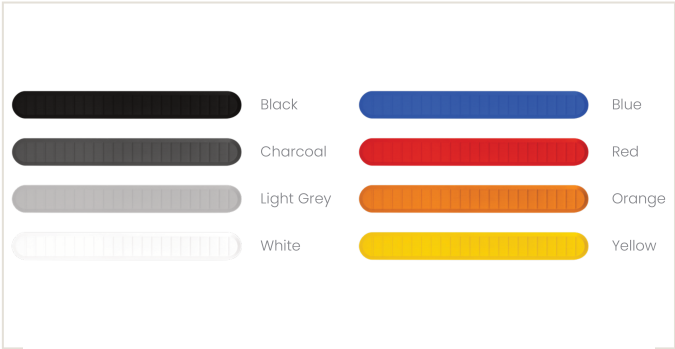

PROFILE & DIMENSIONS (MM)

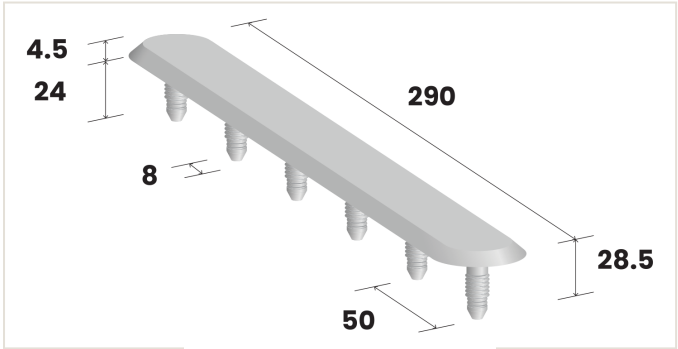

**P5**

Wet pendulum slip (AS 4586)

**45%**

Luminance contrast requirement

**5 yr**

Product warranty

**Infix**

Interference fit anchor

SPECIFICATION

|                                |                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------|
| Tactile type                   | Discrete Directional                                                                      |
| Profile                        | Classic                                                                                   |
| Slip resistance                | P5                                                                                        |
| Luminance contrast requirement | 45%                                                                                       |
| Anchor                         | Infix interference fit                                                                    |
| Substrates                     | Stone   Ceramic   Concrete   Masonry   Timber   Asphalt   Exposed Aggregate   Carpet Tile |
| Warranty                       | 5 Years                                                                                   |

FINISHES & LUMINANCE (LRV)

| TACTILE COLOUR | CODE   | DRY   | WET   |
|----------------|--------|-------|-------|
| Black          | 121121 | 1.91  | 1.89  |
| Charcoal       | 121122 | 11.34 | 11.61 |
| Light Grey     | 121123 | 58.89 | 58.63 |
| White          | 121124 | 87.60 | 87.65 |
| Blue           | 121125 | 8.73  | 8.66  |
| Red            | 121126 | 16.26 | 15.85 |
| Orange         | 121127 | 25.42 | 25.21 |
| Yellow         | 121128 | 70.01 | 69.75 |

SPECIFY IT

Specify: Korb Renzo Classic Discrete Directional TGSI; Infix interference fit anchor; slip resistance P5 to AS 4586; luminance contrast ≥45% to AS 1428.1; fixed to manufacturer’s instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-RENZO\_CLASSIC\_DISCRETE\_DIRECTIONAL  
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 13878.3 / 13915.4.