

Renzo® Tile


Integrated Directional

The Renzo Tile Integrated is an integrated tactile ground surface indicator (TGSi) tile with a peel-and-stick adhesive backing for surface-mounted installation onto prepared substrates. It is classified P5 to AS 4586 (wet pendulum), meets the luminance contrast requirements of AS 1428.1, and conforms to the discrete TGSi dimensional requirements of AS 1428.4.1. It is suitable for high-traffic internal and external pedestrian environments, with other profiles available across the range

COMPLIES WITH

AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

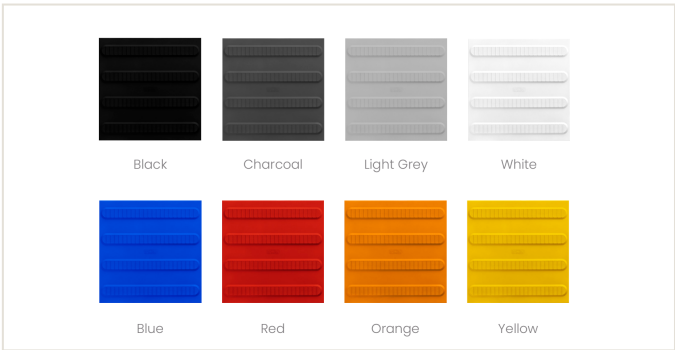

PROFILE & DIMENSIONS (MM)



P5

Wet pendulum slip (AS 4586)

30%

Luminance contrast (AS 1428.1)

5 yr

Product warranty

Integrated

Peel & stick TGSi tile

SPECIFICATION

Material	Integrated tactile tile (peel & stick adhesive)
Dimensions	299 x 299 x 3 mm
Slip resistance	P5
Luminance contrast requirement	30%
Substrates	Stone Ceramic Concrete Masonry Timber Asphalt Exposed aggregate Carpet tile Carpet with underlay
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

TACTILE COLOUR	CODE	DRY LRV	WET LRV
Black	123121	1.91	1.89
Charcoal	123122	11.34	11.61
Light Grey	123123	58.89	58.63
White	123124	87.60	87.65
Blue	123125	8.73	8.66
Red	123126	16.26	15.85
Orange	123127	25.42	25.21
Yellow	123128	70.01	69.75

SPECIFY IT

Specify: Korb Renzo Tile Integrated Directional TGSi; integrated peel & stick tactile tile, 299 x 299 x 3 mm; slip resistance P5 to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-RENZO_TILE_INTEGRATED_DIRECTIONAL Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 14314.1.