


Renzo® Vanguard

Integrated Warning


The Renzo Vanguard Integrated Warning is a mechanically fixed integrated warning tactile ground surface indicator tile, secured with eight nylon drive anchors to resist rotation and removal. It carries a P5 slip rating to AS 4586, and its tactile geometry conforms to AS 1428.4.1. A colour range is available to meet the minimum 30% luminance contrast required by AS 1428.1, and the mechanical fixing makes it suitable for high-traffic external installations

COMPLIES WITH AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

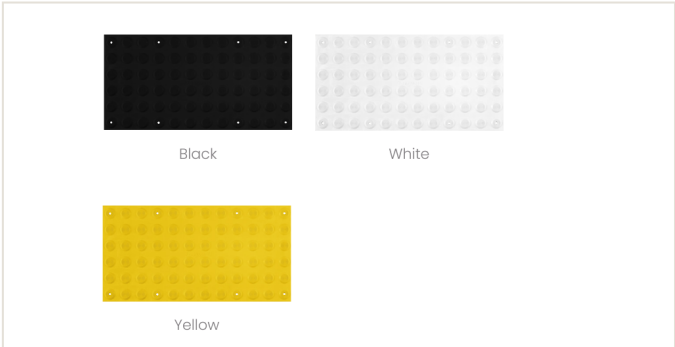

PROFILE & DIMENSIONS (MM)

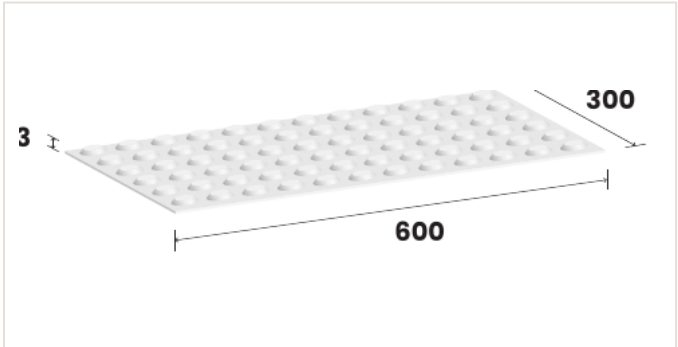

P5

Wet pendulum slip (AS 4586)

30%

Luminance contrast requirement (AS 1428.1)

5 yr

Product warranty

Integrated

Mechanically fixed tile (8 point)

SPECIFICATION

Profile	Integrated Warning (discrete)
Tile size (W x D x H)	600 x 300 x 3 mm
Fixing	8 point mechanical fixing with nylon drive anchors
Slip resistance	P5
Luminance contrast requirement	30%
Substrates	Stone Concrete Masonry Timber Asphalt Exposed aggregate
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

TACTILE COLOUR	CODE	DRY LRV	WET LRV
Black	124111	1.36	1.85
White	124114	81.98	81.43
Yellow	124118	63.23	63.72

SPECIFY IT

Specify: Korb Renzo Vanguard Integrated Warning TGSI tile (600 x 300 x 3 mm); 8 point mechanical fixing with nylon drive anchors; slip resistance P5 to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-RENZO_VANGUARD_INTEGRATED_WARNING
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 17552-1 / 17552-2.