Coral® Flooring Classic


Entry Matting

Coral Flooring Classic is a textile entrance matting system that captures moisture and dirt from footwear at building entries, available in a selection of neutral hues. It is classified P5 to AS 4586, the highest wet-pendulum slip-resistance rating, and is durable under sustained foot traffic. Suited to high-traffic entrances where ongoing dirt and moisture capture is required

COMPLIES WITH AS 4586 (slip resistance) · Critical Radiant Flux · Smoke Development Rate

PRODUCT — CARRIER & MATTING FINISHES

MATTING COLOUR

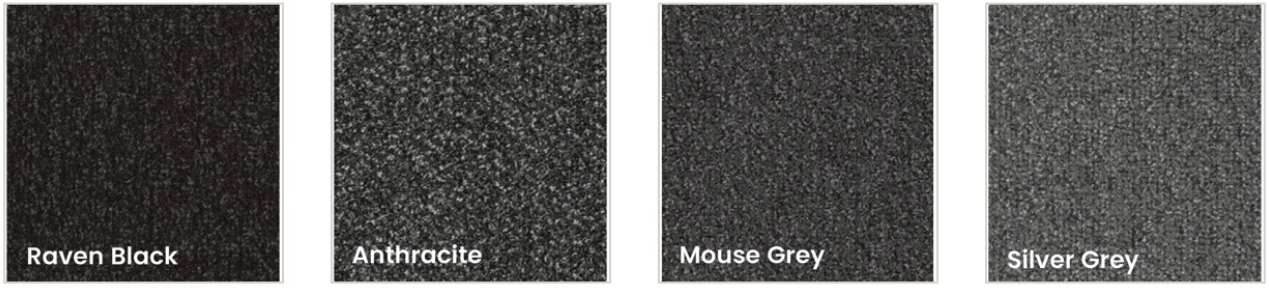

P5	10 yr	2000mm	Coral
Slip resistance classification (AS 4586)	Product warranty	Roll width	Entry matting

SPECIFICATION

Critical Radiant Flux	5.7 kW/m²
Smoke Development Rate	194% min
Roll Width	2000mm
Slip Resistance Classification	P5
Warranty	10 years

MATTING COLOURS & LUMINANCE (LRV)

MATTING COLOUR	CODE	MEAN DRY LUMINANCE (LRV)
Raven Black	340121	2
Anthracite	340122	6
Mouse Grey	340123	4
Silver Grey	340124	9

SPECIFY IT

Specify: Korb Coral Flooring Classic entry matting; 2000mm roll width; slip resistance P5 to AS 4586; fixed to manufacturer's instructions. No substitution without written approval

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 7457.3.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454