
Tadao® Brass

Stair Nosing


Tadao Brass Stair Nosing is machined from solid architectural grade brass and fixes to the stair edge to define the step nosing. It is classified P5 to AS 4586 (wet pendulum), the highest slip-resistance classification, suiting it to high-traffic stair edges in commercial and public buildings. As an uncoated brass, the surface oxidises over time to form a patina, which can be maintained or left to develop

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

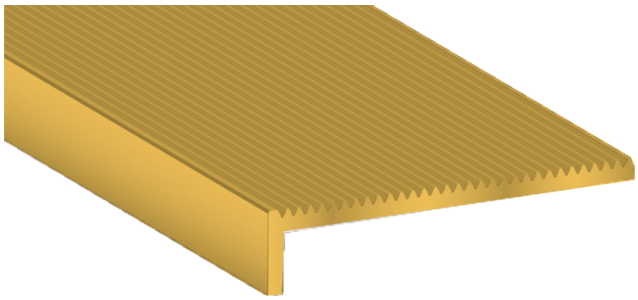

PROFILE & DIMENSIONS (MM)

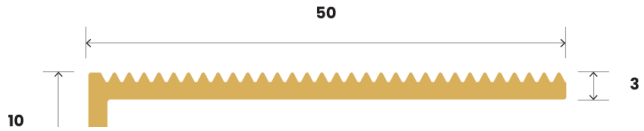

P5	30%	5 yr	Brass
Wet pendulum slip (AS 4586)	Luminance contrast requirement (AS 1428.1)	Product warranty	Solid architectural grade

SPECIFICATION

Material	Solid architectural grade brass
Profile	Corrugated 10 x 50mm
Slip resistance	P5
Luminance contrast requirement	30%
Mean dry luminance (LRV)	57.99
Mean wet luminance (LRV)	58.74
Recommended rebate (W x D)	48 x 4mm
Substrates	Stone | Ceramic | Concrete | Masonry | Timber | Vinyl
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

FINISH	CODE	MEAN DRY LUMINANCE (LRV)	MEAN WET LUMINANCE (LRV)
Brass	230101	57.99	58.74

Custom colours available on request.

SPECIFY IT

Specify: Korb Tadao Brass Stair Nosing; solid architectural grade brass; corrugated 10 x 50mm profile; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-TADAO_BRASS_CORRUGATED_10X50MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454