
Venturi® Aluminium

Flooring Tile (L)


The Venturi Aluminium Flooring Tile (L) stair nosing is a single-piece anodised aluminium carrier fitted with a polymer, silicon carbide, or anodised aluminium insert and concealed fixings, supplied as a longer extrusion length. This Flooring Tile profile sits flush against an adjacent floor finish and stone tile, for use wherever the nosing finishes level with another product and neither rebating nor surface-mounting applies; other profiles are available across the range. Slip resistance to AS 4586 is P5 for corrugated inserts and P4 for striped inserts

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

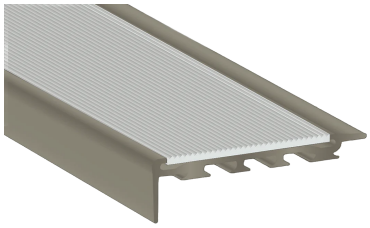

PROFILE & DIMENSIONS (MM)



P5	30%	5 yr	Aluminium
Wet pendulum slip (AS 4586)	Luminance contrast requirement (AS 1428.1)	Product warranty	Anodised profile

SPECIFICATION

Material	Anodised aluminium
Profile	Flooring Tile (L)
Overall width	66 mm
Height	25 mm
Insert depth	2 mm / 5 mm
Slip resistance	P5 (Corrugated inserts) / P4 (Striped inserts)
Luminance contrast requirement	30%
Substrates	Carpet Tile | Vinyl Tile
Warranty	5 years

SPECIFY IT

Specify: Korb Venturi Aluminium Stair Nosing Flooring Tile (L); anodised aluminium with selected insert; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; concealed fixings to manufacturer's instructions. No substitution without written approval

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2 / 9457.5.

FINISHES & LUMINANCE (LRV)

CARRIER	SILVER CORR.	BLACK CORR.	CHAMPAGNE CORR.	HERITAGE CORR.	SILVER STRP.	BLACK STRP.	CHAMPAGNE STRP.	HERITAGE STRP.
SILVER	221611C	221612C	221614C	221615C	221611S	221612S	221614S	221615S
BLACK	221621C	221622C	221624C	221625C	221621S	221622S	221624S	221625S
CHAMPAGNE	221641C	221642C	221644C	221645C	221641S	221642S	221644S	221645S
HERITAGE	221651C	221652C	221654C	221655C	221651S	221652S	221654S	221655S

Luminance LRV dry/wet — Silver Corr. 40.19/39.43 · Black Corr. 2.22/2.22 · Champagne Corr. 12.26/11.75 · Heritage Corr. 4.60/4.13 · Silver Strp. 50.38/48.73 · Black Strp. 3.33/3.31 · Champagne Strp. 15.9/15.3 · Heritage Strp. 6.70/6.00

Slip resistance (AS 4586): P5 / P4 · per insert type

Carriers: Silver 22161x · Black 22162x · Champagne 22164x · Heritage 22165x; Corrugated insert suffix C, Striped insert suffix S. Custom anodised colours available via AAF

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454