
Venturi® Aluminium

Flooring Tile

The Venturi Aluminium Flooring Tile stair nosing is a single-piece anodised aluminium carrier fitted with a polymer, silicon carbide, or anodised aluminium insert and concealed fixings. This profile sits flush against an adjacent floor finish and stone tile, seating in a shallow 59 x 6mm rebate so the nosing finishes level with the abutting product. Slip resistance to AS 4586 is P5 for corrugated inserts and P4 for striped inserts, with Silver, Black, Brass, Heritage and Champagne anodised finishes; recessed and surface-mounted profiles are also available in the range.


COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · National Construction Code (NCC)

PRODUCT

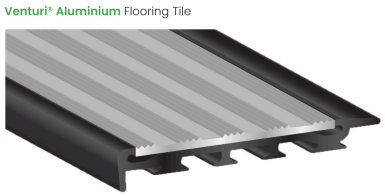

* Pictured 221321S

PROFILE & DIMENSIONS (MM)

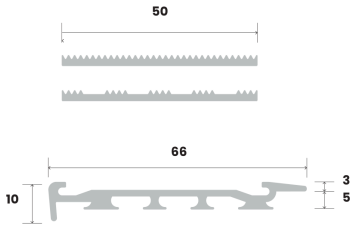

P5	30%	5 yr	Aluminium
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	Anodised carrier

SPECIFICATION

Profile	Flooring Tile
Insert options	Polymer | Silicon carbide | Anodised aluminium
Slip resistance	P5 / P4
Luminance contrast requirement	30%
Recommended rebate (W x D)	59 x 6mm
Substrates	Carpet tile | Vinyl tile
Warranty	5 years

SPECIFY IT

Specify: Korb Venturi Aluminium Flooring Tile; anodised aluminium carrier with polymer, silicon carbide or anodised aluminium insert; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2 / 9457.5.

FINISHES & LUMINANCE (LRV)

CARRIER	SILVER CORR.	BLACK CORR.	CHAMPAGNE CORR.	HERITAGE CORR.	SILVER STRP.	BLACK STRP.	CHAMPAGNE STRP.	HERITAGE STRP.
SILVER	221311C	221312C	221314C	221315C	221311S	221312S	221314S	221315S
BLACK	221321C	221322C	221324C	221325C	221321S	221322S	221324S	221325S
CHAMPAGNE	221341C	221342C	221344C	221345C	221341S	221342S	221344S	221345S
HERITAGE	221351C	221352C	221354C	221355C	221351S	221352S	221354S	221355S

Luminance LRV dry/wet — Silver Corr. 40.19/39.43 · Black Corr. 2.22/2.22 · Champagne Corr. 12.26/11.75 · Heritage Corr. 4.60/4.13 · Silver Strp. 50.38/48.73 · Black Strp. 3.33/3.31 · Champagne Strp. 15.9/15.3 · Heritage Strp. 6.70/6.00

Slip resistance (AS 4586): P5 / P4 · per insert type

Carrier codes by insert: Corrugated 221311C–221355C · Striped 221312S–221355S (Silver / Black / Champagne / Heritage carriers; Custom anodised colour available via AAF)

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454