
Venturi® Brass

Carpet with Underlay

The Venturi Brass Carpet with Underlay stair nosing is constructed from an architectural grade brass carrier and accepts brass inserts (corrugated or striped). It finishes flush into a carpet-and-underlay threshold, with the gripper leg engaging the carpet system. Tested to AS 4586, it achieves a P5 slip rating or P4, suiting carpeted stairs in commercial and high-traffic settings. Other profiles are available across the Venturi Brass range


COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

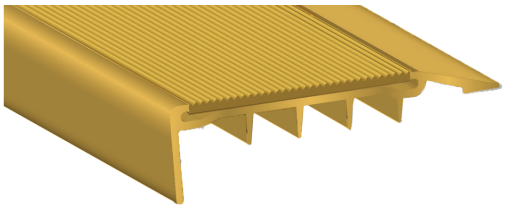

* Pictured 220401C

PROFILE & DIMENSIONS (MM)

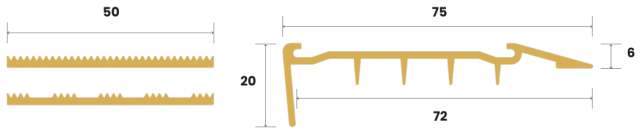

P5	30%	5 yr	Brass
Wet pendulum slip (AS 4586)	Luminance contrast requirement (AS 1428.1)	Product warranty	Architectural grade carrier

SPECIFICATION

Material	Architectural grade brass carrier
Insert options	Brass Corrugated | Brass Striped
Profile	75 mm wide x 20 mm high; 50 mm insert
Slip resistance	P5 (220401C) / P4 (220401S)
Luminance contrast requirement	30%
Substrates	Carpet with Underlay | Broadloom Carpet
Warranty	5 years

SPECIFY IT

Specify: Korb Venturi Brass Carpet with Underlay; architectural grade brass carrier with brass insert; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2 / 9457.5.

BRASS CARRIER FINISHES & LUMINANCE (LRV)

CODE	INSERT	DRY LRV	WET LRV	SLIP (AS 4586)
220401C	Brass Corrugated	57.99	58.74	P5
220401S	Brass Striped	62.31	63.17	P4

Custom colours available on request.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454