Renzo® Classic

Discrete Directional


The Renzo Classic Discrete Directional is a discrete-type tactile ground surface indicator fixed by interference-fit anchor, a mechanical fixing that resists rotation and removal and suits drill-fixed installation across common hard substrates. It achieves a P5 slip resistance classification to AS 4586, dimensioned to AS 1428.4.1, with luminance contrast to AS 1428.1. Other profiles are available across the Renzo Classic range

COMPLIES WITH AS 1428.4.1 (tactile dimensions) · AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT



PROFILE & DIMENSIONS (MM)

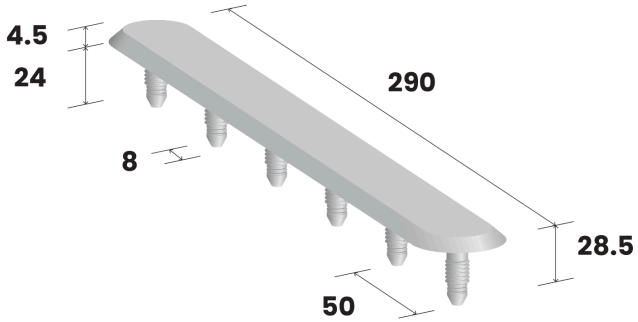

P5	45%	5 yr	Infix
Wet pendulum slip (AS 4586)	Luminance contrast requirement	Product warranty	Interference fit anchor

SPECIFICATION

Tactile type	Discrete Directional
Profile	Classic
Slip resistance	P5
Luminance contrast requirement	45%
Anchor	Infix interference fit
Substrates	Stone | Ceramic | Concrete | Masonry | Timber | Asphalt | Exposed Aggregate | Carpet Tile
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

TACTILE COLOUR	CODE	DRY	WET
Black	121121	1.91	1.89
Charcoal	121122	11.34	11.61
Light Grey	121123	58.89	58.63
White	121124	87.60	87.65
Blue	121125	8.73	8.66
Red	121126	16.26	15.85
Orange	121127	25.42	25.21
Yellow	121128	70.01	69.75

SPECIFY IT

Specify: Korb Renzo Classic Discrete Directional TGSI; Infix interference fit anchor; slip resistance P5 to AS 4586; luminance contrast ≥45% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-TGSI-RENZO_CLASSIC_DISCRETE_DIRECTIONAL
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 13878.3 / 13915.4.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454