
Aalto® Aluminium

Recessed


The Aalto Aluminium Recessed stair nosing is manufactured from T6 tempered 6063 architectural grade aluminium with a recessed silicon carbide infill. It is designed for rebated applications, seating into a routed channel cut into the substrate so the nosing finishes flush with the stair edge. The infill achieves a P5 slip resistance rating when tested to AS 4586, and the insert can be specified to provide luminance contrast in accordance with AS 1428.1

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

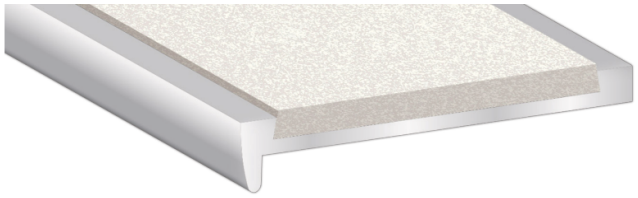

PROFILE & DIMENSIONS (MM)

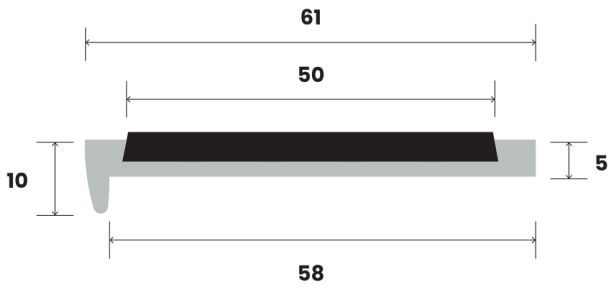

P5	30%	10 yr	Aluminium
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	T6 tempered 6063 grade

SPECIFICATION

Material	T6 tempered 6063 architectural grade aluminium with silicon carbide infill
Profile	Recessed 10 x 61 x 5mm
Slip resistance	P5
Luminance contrast requirement	30%
Substrates	Stone | Concrete | Timber | Vinyl | Carpet Tile
Warranty	10 Years

FINISHES & LUMINANCE (LRV)

FINISH	CODE	DRY	WET
Black / Silver	211311	3.29	2.95
White / Silver	211314	53.95	50.16
Yellow / Silver	211318	61.36	58.66
Black / Black	211321	3.29	2.95
White / Black	211324	53.95	50.16
Yellow / Black	211328	61.36	58.66

SPECIFY IT

Specify: Korb Aalto Aluminium Recessed stair nosing (10 x 61 x 5mm); T6 tempered 6063 architectural grade aluminium with silicon carbide infill; slip resistance P5 to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-AALTO_ALUMINIUM_RECESSED_10X61X5MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 15/9638.1.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454