
Aalto® Brass

Recessed


The Aalto Brass Recessed is manufactured from solid architectural grade brass for rebated applications, seating in a routed channel cut into the substrate so it finishes flush with the floor surface. It achieves a slip resistance classification of P5 when tested to AS 4586, and the brass surface develops a natural patina with use. It is suited to high-traffic entrances and architectural fitouts where a durable recessed metal finish is specified; other profiles are available across the range

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

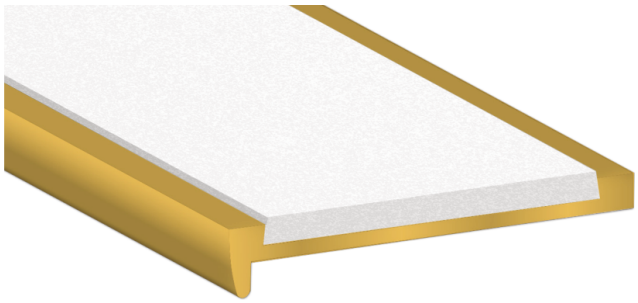

PROFILE & DIMENSIONS (MM)

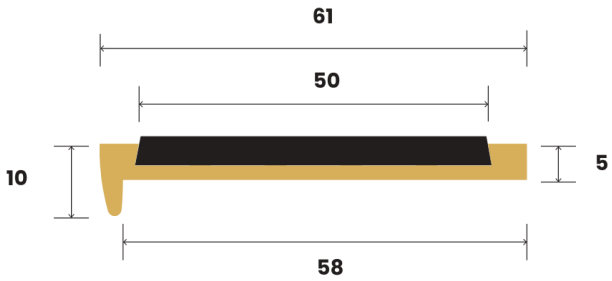

P5	30%	10 yr	Brass
Wet pendulum slip (AS 4586)	Luminance contrast requirement (AS 1428.1)	Product warranty	Solid architectural grade brass

SPECIFICATION

Material	Solid architectural grade brass
Profile	Recessed, 10 x 61mm
Insert	Forged silicon carbide infill
Slip resistance	P5
Luminance contrast requirement	30%
Substrates	Stone | Concrete | Timber | Vinyl | Carpet Tile
Warranty	10 Years

FINISHES & LUMINANCE (LRV)

FINISH	CODE	DRY	WET
Black	210301	3.29	2.95
White	210304	53.95	50.16

SPECIFY IT

Specify: Korb Aalto Brass Recessed 10 x 61mm stair nosing; solid architectural grade brass with silicon carbide infill; slip resistance P5 to AS 4586; luminance contrast ≥ 30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-AALTO_BRASS_RECESSED_10X61MM
Independently slip-tested to AS 4586 by ATTAR, a NATA-accredited laboratory (Accreditation No. 2735) · Report 15/9638.1.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454