
Aalto® Brass

Surface Mounted 10 x 75mm


The Aalto Brass Surface Mounted 10 x 75mm is manufactured from solid architectural grade brass and is fixed directly to the stair or floor edge with no rebate required, making it suited to retrofit applications or anywhere a rebate cannot be cut. It achieves a slip resistance classification of P5 when tested to AS 4586, and the brass surface develops a natural patina with use. Recessed and other profiles are available across the range

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

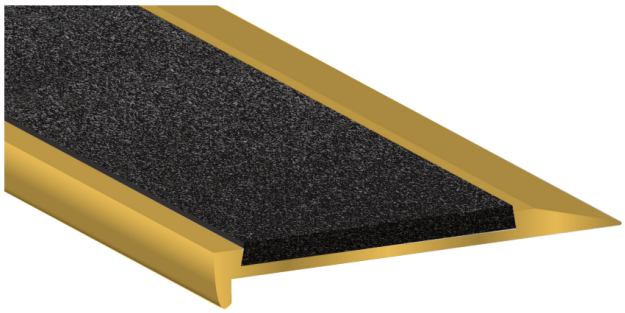

PROFILE & DIMENSIONS (MM)

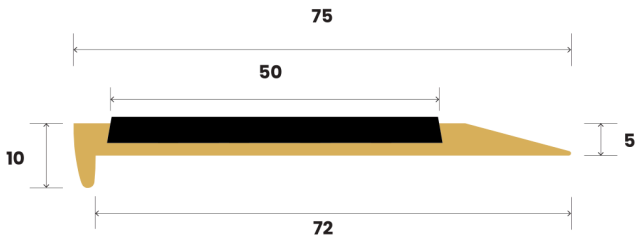

P5	30%	10 yr	Brass
Wet pendulum slip (AS 4586)	Luminance contrast requirement (AS 1428.1)	Product warranty	Architectural grade brass

SPECIFICATION

Material	Solid architectural grade brass with forged silicon carbide infill
Profile	Surface Mounted 10 x 75mm
Slip resistance	P5
Luminance contrast requirement	30%
Substrates	Stone | Ceramic | Concrete | Masonry | Timber | Vinyl | Checker Plate
Warranty	10 Years

FINISHES & LUMINANCE (LRV)

FINISH	CODE	DRY	WET
Black	210101	3.29	2.95
White	210104	53.95	50.16

SPECIFY IT

Specify: Korb Aalto Brass Surface Mounted 10 x 75mm; solid architectural grade brass with silicon carbide infill; slip resistance P5 to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-AALTO_BRASS_SURFACE_MOUNTED_10X75MM

Independently slip-tested to AS 4586 by ATTAR, a NATA-accredited laboratory (Accreditation No. 2735) · Report 15/9638.1.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454