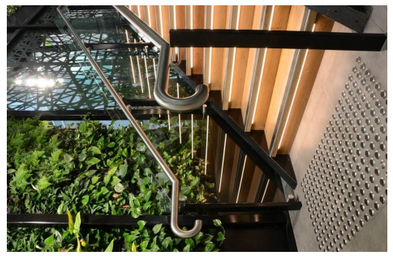
TGSI, Stair Nosing & Entry Matting Schedule

To be read with the architectural drawings, specification and Korb product data sheets.

PROJECT	PROJECT NO.	DOCUMENT NO.	REVISION	STATUS	ISSUE DATE	ARCHITECT	SUPPLIER
					03/11/2026		Korb Pty Ltd · 1300 00 KORB (5672)

GENERAL NOTES

1. Korb products are specified by name for luminance contrast, slip resistance and compliance. **No substitution** without the Architect's prior written approval, supported by current independent luminance contrast (AS/NZS 1428.4.1) and slip resistance (AS 4586) test reports for the proposed product on this project's floor finishes.
2. Supply and installation by **Korb Pty Ltd or a Korb-accredited installer only**.
3. **Luminance contrast to be confirmed by Korb**: on-site luminance contrast test of the installed product against the adjacent surface, wet and dry, with a Korb test certificate issued at completion.
4. Read with the drawings, specification and Korb data sheets. Refer to plans for exact locations; dimensions to be verified on site.

CODE	ITEM	LOCATION	PRODUCT SELECTION	NOTES	SUPPLIER	IMAGE	REV
OTHER ITEMS (ITM)							
ITM-01	Handrail warning button	LRV not entered Refer to plans for exact locations.	Manufacturer: Korb Range: Nouvel® Dome Code: TBC (contact Korb) Material / finish: Stainless Steel Size: Ø10mm to 12mm x 4mm to 5mm H Slip rating: P5 (AS 4586) Data sheet · Product page	**Installed by Korb or a Korb-accredited installer only.** WARRANTY: Term per the Korb data sheet; Korb manufacturer's warranty; installation workmanship covered when installed by Korb or a Korb-accredited installer.	Korb Pty Ltd 1300 00 KORB (5672) info@korb.au korb.au		

SPECIFICATION CLAUSE

TACTILE GROUND SURFACE INDICATORS

Product: Nouvel® Dome by Korb Pty Ltd
Type: Handrail-mounted tactile warning button (Infix)
Material: Stainless Steel
Format: Ø10mm to 12mm x 4mm to 5mm H
Configuration: handrail warning button as required
Application: as specified by architect

PERFORMANCE REQUIREMENT (any supplied product must meet)

- Domed button: 4mm to 5mm in height and 10mm to 12mm in diameter, per AS/NZS 1428.4.1:2009.
- Fixing: Infix. The dome shaft sets into a drilled hole in the handrail and seats on the top face.
- Location: on top of the stair or ramp handrail, 150mm from the end of the handrail.
- Note: this product is a handrail-mounted tactile button, not a tactile ground surface indicator. NCC 2022 D4D9(3) allows it in place of warning TGSIs at stairways and ramps only in aged care and Class 9a health-care buildings.
- Compliance: AS/NZS 1428.4.1:2009 (tactile indicators) · NCC 2022 D4D9(3).

INSTALLED BY

Supplied and installed by Korb Pty Ltd's qualified installers (VIC · SA · WA).

WARRANTY

5 year manufacturer's warranty against defects in materials and workmanship.

SUPPLIER

Korb Pty Ltd
www.korb.au | info@korb.au
VIC · SA · WA

SUBSTITUTION

This item is specified as Nouvel® Dome by Korb Pty Ltd. Where documented "or equal approved", any proposed substitute must demonstrably satisfy EVERY stated minimum above: luminance contrast %, slip classification and format dimensions, verified by current test reports. Nouvel® Dome meets or exceeds all stated requirements.

Clause generated by korb.au/spec-tools on 03/11/2026. References AS standards current at this date. Verify currency before final submission.