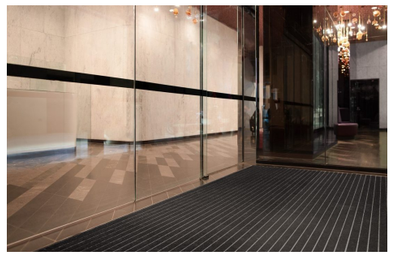
TGSI, Stair Nosing & Entry Matting Schedule

To be read with the architectural drawings, specification and Korb product data sheets.

PROJECT	PROJECT NO.	DOCUMENT NO.	REVISION	STATUS	ISSUE DATE	ARCHITECT	SUPPLIER
					03/11/2026		Korb Pty Ltd · 1300 00 KORB (5672)

GENERAL NOTES

1. Korb products are specified by name for luminance contrast, slip resistance and compliance. **No substitution** without the Architect's prior written approval, supported by current independent luminance contrast (AS/NZS 1428.4.1) and slip resistance (AS 4586) test reports for the proposed product on this project's floor finishes.
2. Supply and installation by **Korb Pty Ltd or a Korb-accredited installer only**.
3. **Luminance contrast to be confirmed by Korb**: on-site luminance contrast test of the installed product against the adjacent surface, wet and dry, with a Korb test certificate issued at completion.
4. Read with the drawings, specification and Korb data sheets. Refer to plans for exact locations; dimensions to be verified on site.

CODE	ITEM	LOCATION	PRODUCT SELECTION	NOTES	SUPPLIER	IMAGE	REV
ENTRY MATTING (MAT)							
MAT-01	Entry matting	LRV not entered Refer to plans for exact locations.	Manufacturer: Korb Range: Rohre Aluminium Coral Classic Code: TBC (contact Korb) Material / finish: Anodised Aluminium carrier (Mill/Black/Heritage/Champagne) with high-retention textile insert Size: 600 mm tile, 13 mm high Slip rating: P5 (AS 4586) Data sheet · Product page	**Installed by Korb or a Korb-accredited installer only.** WARRANTY: 10-year Korb manufacturer's warranty; installation workmanship covered when installed by Korb or a Korb-accredited installer.	Korb Pty Ltd 1300 00 KORB (5672) info@korb.au korb.au		

SPECIFICATION CLAUSE

ENTRANCE MATTING

Product: Rohre® Aluminium Classic by Korb Pty Ltd
Type: Recessed entrance matting system - textile insert
Material: Anodised Aluminium carrier (Mill/Black/Heritage/Champagne) with high-retention textile insert
Format: Modular panels, cut to mat well dimensions
Zone: Zone 2/3 primary entry and circulation
Application: as specified by architect

PERFORMANCE REQUIREMENT (attribute-led)

- Installation: recessed mat well (or surface-mounted framing where noted).
- Coverage: full doorway width, minimum 1 metre depth of foot travel (greater depth removes more dirt and moisture, so specify to suit traffic).
- Carrier: anodised aluminium (Mill/Black/Heritage/Champagne).
- Insert: high-retention textile, retains dirt and moisture at entry.
- Slip resistance: classified P5 to AS 4586:2013.
- Compliance: AS 4586:2013.

INSTALLED BY

Supplied and installed by Korb Pty Ltd’s qualified installers (VIC · SA · WA).

WARRANTY

10 year manufacturer’s warranty against defects in materials and workmanship.

SUPPLIER

Korb Pty Ltd
www.korb.au | info@korb.au
VIC · SA · WA

SUBSTITUTION

This item is specified as Rohre® Aluminium Classic by Korb Pty Ltd. Where documented "or equal approved", any proposed substitute must demonstrably satisfy EVERY stated minimum above: recessed-well depth, coverage width, carrier material/finish and insert retention, verified by current test reports. Rohre® Aluminium Classic meets or exceeds all stated requirements.

Clause generated by korb.au/spec-tools on 03/11/2026. References AS standards current at this date. Verify currency before final submission.