
Tadao® Brass

Surface Mounted


Tadao Brass is a stair nosing machined from solid architectural grade brass with a corrugated anti-slip tread face. Being a solid profile it can be surface-fixed to the stair edge or set into a rebate (recommended 52 x 4mm). It is classified P5 to AS 4586 (wet pendulum), the highest slip-resistance classification, for high-traffic stair edges; as uncoated brass the surface develops a natural patina over time

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

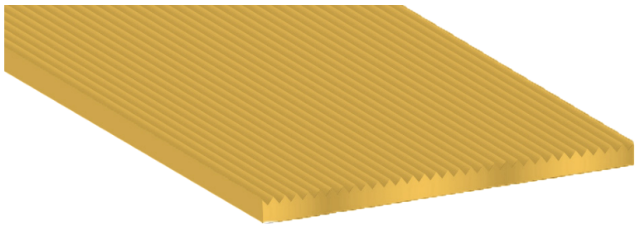

PROFILE & DIMENSIONS (MM)

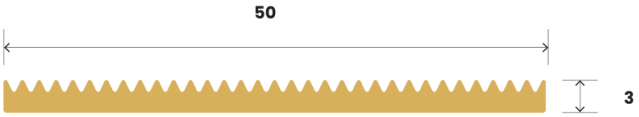

P5	30%	5 yr	Brass
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	Solid architectural grade brass

SPECIFICATION

Material	Solid architectural grade brass
Profile	Corrugated 50 x 3mm
Slip resistance	P5
Luminance contrast requirement	30%
Recommended rebate (W x D)	52 x 4mm
Substrates	Stone | Ceramic | Concrete | Masonry | Timber
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

COLOUR	CODE	DRY LRV	WET LRV
Brass	230201	57.99	58.74

Custom colours available on request.

SPECIFY IT

Specify: Korb Tadao Brass Surface Mounted stair nosing; solid architectural grade brass; corrugated 50 x 3mm profile; slip resistance P5 to AS 4586; luminance contrast ≥ 30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-TADAO_BRASS_CORRUGATED_50X3MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454