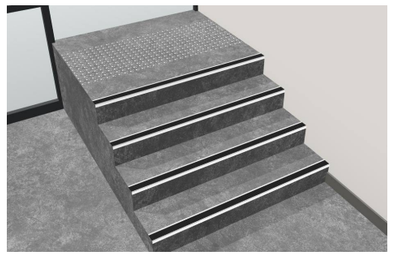
# TGSI, Stair Nosing & Entry Matting Schedule

To be read with the architectural drawings, specification and Korb product data sheets.

| PROJECT | PROJECT NO. | DOCUMENT NO. | REVISION | STATUS | ISSUE DATE | ARCHITECT | SUPPLIER |
|---|---|---|---|---|---|---|---|
| | | | | | 03/11/2026 | | Korb Pty Ltd · 1300 00 KORB (5672) |

**GENERAL NOTES**

1. Korb products are specified by name for luminance contrast, slip resistance and compliance. **No substitution** without the Architect's prior written approval, supported by current independent luminance contrast (AS/NZS 1428.4.1) and slip resistance (AS 4586) test reports for the proposed product on this project's floor finishes.
2. Supply and installation by **Korb Pty Ltd or a Korb-accredited installer only**.
3. **Luminance contrast to be confirmed by Korb**: on-site luminance contrast test of the installed product against the adjacent surface, wet and dry, with a Korb test certificate issued at completion.
4. Read with the drawings, specification and Korb data sheets. Refer to plans for exact locations; dimensions to be verified on site.

| CODE | ITEM | LOCATION | PRODUCT SELECTION | NOTES | SUPPLIER | IMAGE | REV |
|---|---|---|---|---|---|---|---|
| **STAIR NOSINGS (NOS)** | | | | | | | |
| **NOS-01** | Stair nosing | LRV not entered<br>Refer to plans for exact locations. | Manufacturer: Korb<br>Range: Venturi Carbtech Flooring Tile (L)<br>Code: TBC (contact Korb)<br>Material / finish: Anodised Aluminium carrier - Carbtech® silicon carbide insert<br>Size: 66 x 25 mm<br>Insert LRV (dry / wet): TBC / TBC<br>Slip rating: P5 (AS 4586)<br>Luminance contrast: Minimum 30% to adjacent tread, wet and dry (AS 1428.1)<br>Data sheet · Product page | **Installed by Korb or a Korb-accredited installer only.**<br>**Luminance contrast to be confirmed by Korb on-site test at completion; certificate to Architect.**<br>WARRANTY: 10-year Korb manufacturer's warranty; installation workmanship covered when installed by Korb or a Korb-accredited installer. | Korb Pty Ltd<br>1300 00 KORB (5672)<br>info@korb.au<br>korb.au |  | |

SPECIFICATION CLAUSE

# STAIR NOSING

**Product:** Venturi® Carbtech Flooring Tile (L) by Korb Pty Ltd
**Type:** Stair nosing, anodised aluminium carrier with UV stabilised Carbtech® silicon carbide insert
**Material:** Anodised Aluminium carrier - Carbtech® silicon carbide insert
**Format:** 66mm wide x 25mm nosing leg, 3mm / 5mm step heights as drawn, 50mm insert. Continuous length, custom cut to stair width
**Configuration:** Flooring tile (FT) profile, long 25mm nosing leg as required
**Application:** as specified by architect

### PERFORMANCE REQUIREMENT (any supplied product must meet)

- Luminance contrast: minimum 30% to the adjacent tread and riser, required to AS 1428.1.
- Contrast strip: 50 to 75mm on the tread. Where the strip is not set back from the front of the nosing, contrast must not extend down the riser more than 10mm. The strip may be set back a maximum of 15mm (AS 1428.1).
- Slip resistance: classified P5 to AS 4586:2013 (Carbtech® silicon carbide insert carries the slip resistance and the contrasting luminance band).
- Suitable for internal and external applications. Carbtech® is UV stabilised and impact, chemical and corrosion resistant.
- Carbtech® is abrasive and is less suitable for barefoot traffic areas.
- Compliance: AS 1428.1:2021 · AS 4586:2013 · NCC 2022 Part D3.

### INSTALLATION

- Fixing method: flooring tile profile, to suit carpet tile and vinyl tile finishes, per the architect's stair detail.
- Fixing: Adhesive or screw fixed (removable insert).
- Carbtech® silicon carbide insert supplied to suit fixing as detailed.

### INSTALLED BY

Supplied and installed by Korb Pty Ltd's qualified installers (VIC · SA · WA).

### WARRANTY

10 year manufacturer's warranty against defects in materials and workmanship.

### SUPPLIER

Korb Pty Ltd
www.korb.au | info@korb.au
VIC · SA · WA

### SUBSTITUTION

This item is specified as Venturi® Carbtech Flooring Tile (L) by Korb Pty Ltd. Where documented "or equal approved", any proposed substitute must demonstrably satisfy EVERY stated minimum above: luminance contrast %, slip classification, strip/format dimensions and installation method, verified by current test reports. Venturi® Carbtech Flooring Tile (L) meets or exceeds all stated requirements.

Clause generated by korb.au/spec-tools on 03/11/2026. References AS standards current at this date. Verify currency before final submission.