
Venturi® Polymer

Recessed


The Venturi Polymer Recessed is a UV stable polymer insert for rebated access and entry applications, seating in a rebate routed into the substrate so it finishes flush. It achieves a P5 slip rating to AS 4586, the highest pedestrian classification in both wet and dry conditions, suiting wet and barefoot-traffic areas such as aquatic centres and beach access. Other profiles are available across the Venturi Polymer range.

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

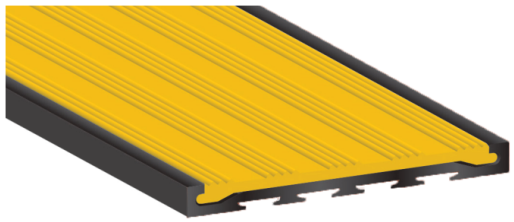

PROFILE & DIMENSIONS (MM)

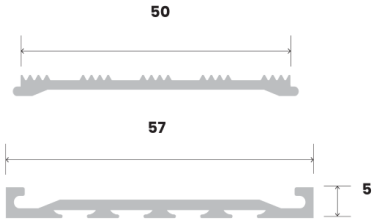

P5	30%	5 yr	Polymer
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	UV-stable insert

SPECIFICATION

Material	UV stable, shrink resistant polymer insert with anodised carrier
Profile	Recessed
Slip resistance	P5
Luminance contrast requirement	30%
Recommended rebate (W x D)	59 x 6mm
Substrates	Stone | Concrete | Timber
Warranty	5 years

SPECIFY IT

Specify: Korb Venturi Polymer Recessed stair nosing; UV stable, shrink resistant polymer insert in anodised carrier; slip resistance P5 to AS 4586; luminance contrast ≥30% to AS 1428.1; recessed into 59 x 6mm rebate; fixed to manufacturer's instructions. No substitution without written approval

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 10772.5.

FINISHES & LUMINANCE (LRV)

CARRIER	BLACK	CHARCOAL	GREY	WHITE	BLUE	RED	ORANGE	YELLOW
SILVER	223211	223212	223213	223214	223215	223216	223217	223218
BLACK	223221	223222	223223	223224	223225	223226	223227	223228
CHAMPAGNE	223241	223242	223243	223244	223245	223246	223247	223248
HERITAGE	223251	223252	223253	223254	223255	223256	223257	223258

Luminance LRV dry/wet — Black 2.93/2.59 · Charcoal 8.62/8.54 · Grey 42.72/42.00 · White 73.22/72.76 · Blue 7.84/7.23 · Red 15.04/14.89 · Orange 31.84/30.57 · Yellow 54.68/53.99

Slip resistance (AS 4586): P5 · per insert type

Carrier ranges: Silver 223211–218 · Black 223221–228 · Champagne 223241–248 · Heritage 223251–258 · Custom colours available on request.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454