Tadao® Aluminium


Striped

The Tadao Aluminium Striped stair nosing is an extruded 6063-T6 tempered aluminium profile with a striped anti-slip insert, available in surface mounted and recessed configurations (a corrugated insert is also offered in the range). It achieves a P4 classification to AS 4586, suiting it to external and high-traffic stair applications. An anodised finish is applied for durability in commercial environments

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)


PRODUCT

Tadao® Aluminium Striped 10 x 50mm

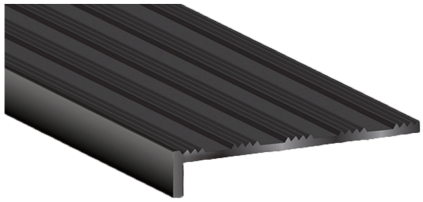

*** Pictured** 231122

PROFILE & DIMENSIONS (MM)

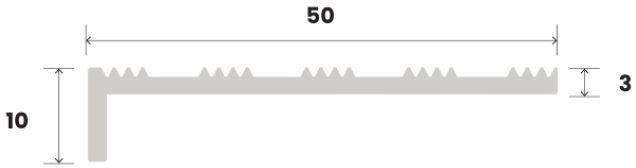

P4	30%	5 yr	6063 T6
Slip resistance (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	Tempered aluminium

SPECIFICATION

Material	6063 T6 tempered aluminium
Profile	Striped 10 x 50mm
Slip resistance	P4
Luminance contrast requirement	30%
Recommended rebate (W x D)	48 x 4mm
Substrates	Stone | Ceramic | Concrete | Masonry | Timber | Vinyl
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

ANODISED NOSING COLOUR	CODE	DRY	WET
Silver	231112	50.38	48.73
Black	231122	3.33	3.31
Champagne	231142	15.9	15.3
Heritage	231152	6.70	6.00

Custom colours available on request.

SPECIFY IT

Specify: Korb Tadao® Aluminium Striped 10 x 50mm stair nosing; 6063 T6 tempered aluminium; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-TADAO_ALUMINIUM_STRIPED_10X50MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.5.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454