Venturi® Aluminium


Recessed

The Venturi Aluminium Recessed stair nosing is a single-piece anodised aluminium carrier fitted with a polymer, silicon carbide, or anodised aluminium insert and concealed fixings. It is designed for rebated applications, seating in a rebate or routed channel cut into the substrate so the nosing finishes flush with the tread. Slip resistance to AS 4586 is P5 for corrugated inserts and P4 for striped inserts, with finishes in Silver, Black, Brass, Heritage and Champagne anodised


COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

Venturi® Aluminium Recessed

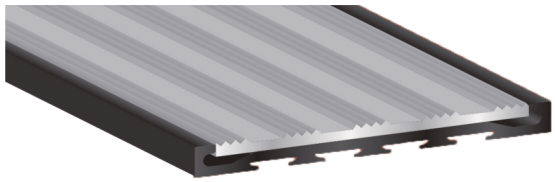

PROFILE & DIMENSIONS (MM)



P5	30%	5 yr	Aluminium
Wet pendulum slip (AS 4586)	Luminance contrast requirement (AS 1428.1)	Product warranty	Anodised carrier

SPECIFICATION

Material	Anodised aluminium carrier with polymer, silicon carbide or anodised aluminium insert
Profile	Recessed
Slip resistance	P5 (corrugated) / P4 (striped)
Luminance contrast requirement	30%
Carrier width	57 mm
Insert width	50 mm
Recess depth	5 mm
Substrates	Carpet tile | Vinyl tile
Warranty	5 years

SPECIFY IT

Specify: Korb Venturi Aluminium Recessed stair nosing; anodised aluminium carrier with selected insert; slip resistance to AS 4586 (P5 corrugated / P4 striped); luminance contrast ≥ 30% to AS 1428.1; concealed fixings; fixed to manufacturer's instructions. No substitution without written approval

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2 / 9457.5.

FINISHES & LUMINANCE (LRV)

CARRIER	SILVER CORR.	BLACK CORR.	CHAMPAGNE CORR.	HERITAGE CORR.	SILVER STRP.	BLACK STRP.	CHAMPAGNE STRP.	HERITAGE STRP.
SILVER	221211C	221212C	221214C	221215C	221211S	221212S	221214S	221215S
BLACK	221221C	221222C	221224C	221225C	221221S	221222S	221224S	221225S
CHAMPAGNE	221241C	221242C	221244C	221245C	221241S	221242S	221244S	221245S
HERITAGE	221251C	221252C	221254C	221255C	221251S	221252S	221254S	221255S

Luminance LRV dry/wet — Silver Corr. 40.19/39.43 · Black Corr. 2.22/2.22 · Champagne Corr. 12.26/11.75 · Heritage Corr. 4.60/4.13 · Silver Strp. 50.38/48.73 · Black Strp. 3.33/3.31 · Champagne Strp. 15.9/15.3 · Heritage Strp. 6.70/6.00

Slip resistance (AS 4586): P5 / P4 · per insert type

Carrier codes by colour. Corrugated inserts (suffix C): Silver 221211/221212/221214/221115 · Black 221221/221222/221224/221125 · Champagne 221241/221242/221244/221145 · Heritage 221251/221252/221254/221155. Striped inserts (suffix S): Silver 221211/221212/221214/221215 · Black 221221/221222/221224/221225 · Champagne 221241/221242/221244/221245 · Heritage 221251/221252/221254/221255 · Custom colours available on request.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454