# Venturi® Aluminium


## Surface Mounted

The Venturi Aluminium Surface Mounted stair nosing is a single-piece anodised aluminium carrier fitted with a polymer, silicon carbide, or anodised aluminium insert and concealed fixings. It surface-fixes directly to the stair or floor edge and requires no rebate, making it the choice for retrofit or anywhere a rebate cannot be cut. Slip resistance to AS 4586 is P5 for corrugated inserts and P4 for striped inserts, in Silver, Black, Brass, Heritage and Champagne anodised finishes

**COMPLIES WITH** AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)


### PRODUCT

**Venturi® Aluminium** Surface Mounted

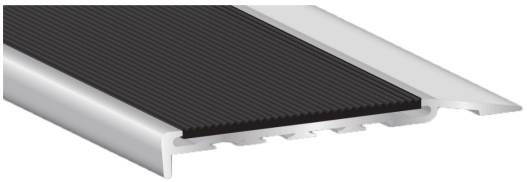

*** Pictured** 221112C

### PROFILE & DIMENSIONS (MM)

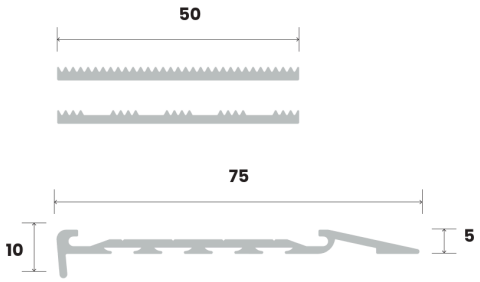


| P5 | 30% | 5 yr | Aluminium |
|---|---|---|---|
| Wet pendulum slip (AS 4586) | Luminance contrast (AS 1428.1) | Product warranty | Anodised carrier |

### SPECIFICATION

| | |
|---|---|
| **Material** | Anodised aluminium carrier with high performance polymer, silicon carbide, or anodised aluminium insert |
| **Profile** | Surface mounted |
| **Slip resistance** | P5 (corrugated) / P4 (striped) |
| **Luminance contrast requirement** | 30% |
| **Insert options** | Corrugated \| Striped |
| **Substrates** | Stone \| Ceramic \| Concrete \| Masonry \| Timber \| Vinyl |
| **Warranty** | 5 years |

### FINISHES & LUMINANCE (LRV)

| COLOUR | INSERT OPTION | CODE | DRY | WET | SLIP |
|---|---|---|---|---|---|
| Silver | Corrugated | 221111C | 40.19 | 39.43 | P5 |
| Black | Corrugated | 221112C | 2.22 | 2.22 | P5 |
| Gold | Corrugated | 221113C | To be tested | | P5 |
| Champagne | Corrugated | 221114C | 12.26 | 11.75 | P5 |
| Heritage | Corrugated | 221115C | 4.60 | 4.13 | P5 |
| Silver | Striped | 221111S | 50.38 | 48.73 | P4 |
| Black | Striped | 221112S | 3.33 | 3.31 | P4 |
| Gold | Striped | 221113S | To be tested | | P4 |
| Champagne | Striped | 221114S | 15.9 | 15.3 | P4 |
| Heritage | Striped | 221115S | 6.70 | 6.00 | P4 |

Carriers: Silver 22111x · Black 22112x · Brass 22110x · Gold 22113x · Champagne 22114x · Heritage 22115x. Insert digit x: 1 Silver · 2 Black · 3 Gold · 4 Champagne · 5 Heritage (no Gold insert on Brass). Corrugated suffix C, Striped suffix S; custom anodised colours via AAF

### SPECIFY IT

Specify: Korb Venturi® Aluminium Surface Mounted stair nosing; anodised aluminium carrier with polymer, silicon carbide, or anodised aluminium insert; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; concealed fixings to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-VENTURI_ALUMINIUM_SURFACE_MOUNTED
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2 / 9457.5.

**National (Head Office)**
T 1300 00 KORB (5672)
E info@korb.au

**Melbourne**
17 Anderson Road,
Thornbury VIC 3071

**Adelaide**
71 Maria Street, Thebarton
SA 5031

**Perth**
U4/4 McNeece Place,
O'Connor WA 6163

**Korb Pty Ltd**
ABN 26 159 533 454