
Venturi® Carbtech

Surface Mounted (L)

The Venturi Carbtech Surface Mounted (L) stair nosing is a longer-length extruded aluminium carrier fitted with a silicon carbide (Carbtech) insert. It surface-fixes directly to the stair or floor edge and requires no rebate, making it the choice for retrofit work or anywhere a rebate cannot be cut (other profiles in the range suit rebated and flush-floor applications). The insert achieves a P5 slip-resistance classification to AS 4586, suitable for internal and external use in wet and contaminated conditions; the abrasive silicon carbide surface is durable and corrosion resistant, and is unsuitable for barefoot traffic areas


COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

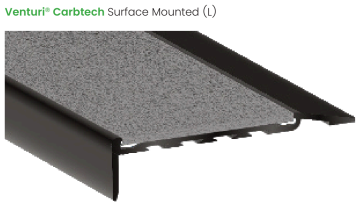

* Pictured 222523

PROFILE & DIMENSIONS (MM)

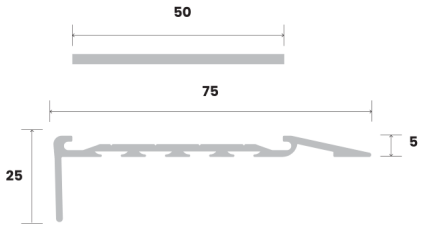

P5	30%	10 yr	Carbtech
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	Silicon carbide insert

SPECIFICATION

Material	Aluminium carrier with silicon carbide (Carbtech) insert
Profile	Surface mounted (L)
Slip resistance	P5
Luminance contrast requirement	30%
Dimensions (W x H x nose)	75mm x 25mm x 5mm (insert 50mm)
Substrates	Stone | Ceramic | Concrete | Masonry | Timber | Vinyl
Warranty	10 years

SPECIFY IT

Specify: Korb Venturi Carbtech Surface Mounted (L) stair nosing; aluminium carrier with silicon carbide (Carbtech) insert; slip resistance P5 to AS 4586; luminance contrast ≥ 30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 8746.3.

INSERT OPTIONS, CARRIER CODES & LUMINANCE

CARRIER	BLACK	GREY	WHITE	YELLOW	LUMINOUS
SILVER	222511	222513	222514	222518	222519
BLACK	222521	222523	222524	222528	222529
CHAMPAGNE	222541	222543	222544	222548	222549
HERITAGE	222551	222553	222554	222558	222559

Luminance LRV dry/wet — Black 4.94/3.94 · Grey 27.53/27.36 · White 80.62/80.68 · Yellow 48.44/47.78 · Luminous 57.89/57.86

Slip resistance (AS 4586): P5 · per insert type

Custom colours available on request.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454