
Tadao® Aluminium

Surface Mounted / Recessed


The Tadao Aluminium Corrugated stair nosing is a solid one-piece 6063-T6 aluminium extrusion with a corrugated anti-slip tread face integral to the profile. Being solid, it installs either surface-mounted to the stair edge or set into a rebate (recommended 48 x 4mm), suiting both new work and retrofit. It is classified P5 to AS 4586 and finished in anodised colours

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

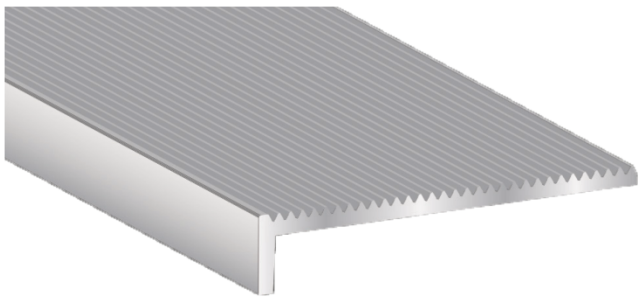

PROFILE & DIMENSIONS (MM)

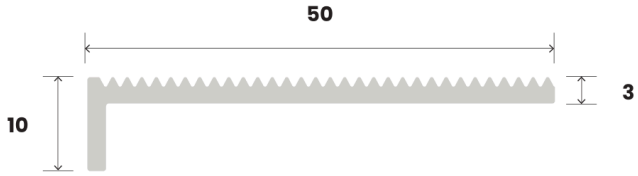

P5	30%	5 yr	Aluminium
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	6063 T6 tempered

SPECIFICATION

Material	6063 T6 tempered aluminium
Profile	Corrugated 10 x 50mm
Slip resistance	P5
Luminance contrast requirement	30%
Recommended rebate (W x D)	48 x 4mm
Substrates	Stone | Ceramic | Concrete | Masonry | Timber | Vinyl
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

FINISH	CODE	DRY	WET
Silver	231111	40.19	39.43
Black	231121	2.22	2.22
Champagne	231141	12.26	11.75
Heritage	231151	4.60	4.13

Custom colours available on request.

SPECIFY IT

Specify: Korb Tadao Aluminium stair nosing, Corrugated 10 x 50mm; 6063 T6 tempered aluminium; slip resistance P5 to AS 4586; luminance contrast ≥30% to AS 1428.1; surface mounted or recessed installation; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-TADAO_ALUMINIUM_CORRUGATED_10X50MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.2.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454