Tadao® Aluminium


Striped 50 x 3mm

The Tadao Aluminium Striped 50 x 3mm stair nosing is an extruded 6063-T6 tempered aluminium profile with a striped anti-slip insert, set into a routed rebate (recommended 52 x 4mm) so the insert sits flush with the stair edge. It achieves a P4 slip classification to AS 4586 and meets the ≥30% luminance contrast requirement of AS 1428.1. An anodised finish is applied for durability in commercial environments; corrugated and surface-mounted profiles are also available in the range

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)


PRODUCT

Tadao® Aluminium Striped 50 x 3mm

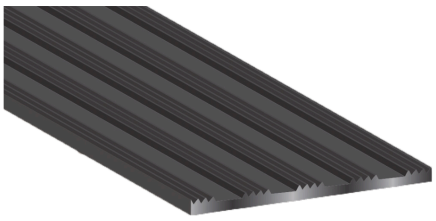

*** Pictured** 231222

PROFILE & DIMENSIONS (MM)

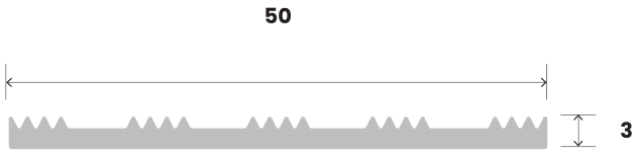

P4	30%	5 yr	Aluminium
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	6063 T6 tempered, anodised

SPECIFICATION

Material	6063 T6 tempered aluminium, anodised
Profile	Striped 50 x 3mm
Slip resistance	P4
Luminance contrast requirement	30%
Recommended rebate (W x D)	52 x 4mm
Substrates	Stone | Ceramic | Concrete | Masonry | Timber
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

FINISH	CODE	DRY	WET
Silver	231212	50.38	48.73
Black	231222	3.33	3.31
Champagne	231242	15.9	15.3
Heritage	231252	6.70	6.00

Custom colours available on request.

SPECIFY IT

Specify: Korb Tadao Aluminium Striped 50 x 3mm stair nosing; 6063 T6 tempered anodised aluminium; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-TADAO_ALUMINIUM_STRIPED_50X3MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.5.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454