
Tadao® Brass

Striped


Tadao Brass Striped is a stair nosing machined from solid architectural grade brass with a striped tread face for slip resistance, supplied in a 10 x 50mm profile set into a recommended 48 x 4mm rebate so it sits flush with the stair edge. It is classified P4 to AS 4586 (wet pendulum), suiting it to high-traffic stair edges in commercial and public buildings. As an uncoated brass, the surface oxidises over time to form a patina; this can be maintained or left to develop. A corrugated tread profile is also available in the range

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

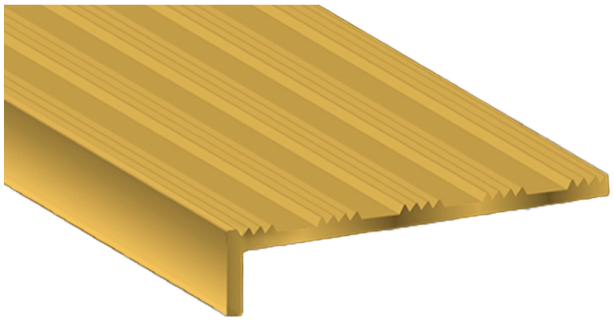

PROFILE & DIMENSIONS (MM)

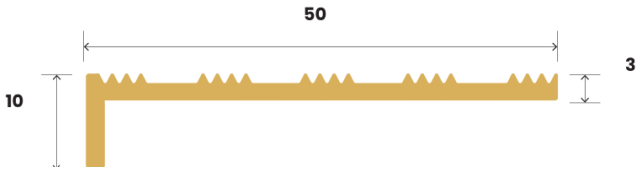

P4	30%	5 yr	Brass
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	Solid architectural grade brass

SPECIFICATION

Material	Solid architectural grade brass
Profile	Striped 10 x 50mm
Slip resistance	P4
Luminance contrast requirement	30%
Mean Dry Luminance (LRV)	62.31
Mean Wet Luminance (LRV)	63.17
Recommended Rebate (W x D)	48 x 4mm
Substrates	Stone | Ceramic | Concrete | Masonry | Timber | Vinyl
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

COLOUR	CODE	DRY	WET
Brass	230102	62.31	63.17

Custom colours available on request.

SPECIFY IT

Specify: Korb Tadao® Brass Striped stair nosing 10 x 50mm; solid architectural grade brass; slip resistance to AS 4586; luminance contrast ≥30% to AS 1428.1; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-TADAO_BRASS_STRIPED_10X50MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.5.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454