
Tadao® Brass

Striped


Tadao Brass Striped is a stair nosing machined from solid architectural grade brass, with a striped 50 x 3mm profile of parallel grooves across the tread face and a recommended rebate of 52 x 4mm. It is classified P4 to AS 4586 (wet pendulum) and meets a luminance contrast of 30% to AS 1428.1, suiting it to stair edges in commercial and public buildings. As an uncoated brass, the surface oxidises over time to form a patina; this can be maintained or left to develop. Other profiles and mounting formats are available across the Tadao range

COMPLIES WITH AS 4586 (slip resistance) · AS 1428.1 (luminance contrast)

PRODUCT

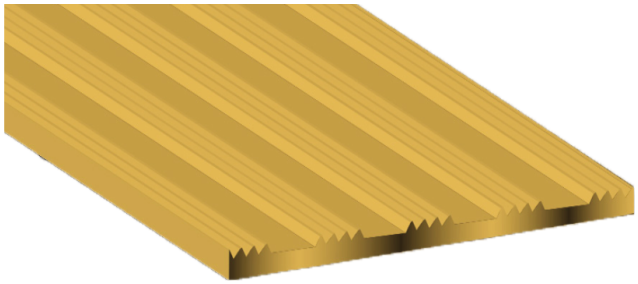

PROFILE & DIMENSIONS (MM)

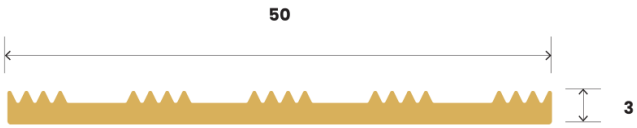

P4	30%	5 yr	Brass
Wet pendulum slip (AS 4586)	Luminance contrast (AS 1428.1)	Product warranty	Solid architectural grade

SPECIFICATION

Material	Solid architectural grade brass
Profile	Striped 50 x 3mm
Slip resistance	P4
Luminance contrast requirement	30%
Recommended rebate (W x D)	52 x 4mm
Substrates	Stone | Ceramic | Concrete | Masonry | Timber
Warranty	5 Years

FINISHES & LUMINANCE (LRV)

PRODUCT CODE	MEAN DRY LUMINANCE (LRV)	MEAN WET LUMINANCE (LRV)
230202	62.31	63.17

Custom colours available on request.

SPECIFY IT

Specify: Korb Tadao Brass Striped 50 x 3mm stair nosing; solid architectural grade brass; slip resistance P4 to AS 4586; luminance contrast ≥30% to AS 1428.1; recommended rebate 52 x 4mm; fixed to manufacturer's instructions. No substitution without written approval

Conforms to AS 4586 (slip resistance) · AS 1428.1 (luminance contrast) · TDS-SN-TADAO_BRASS_STRIPED_50X3MM
Independently slip-tested to AS 4586 by ATTAR — NATA-accredited laboratory (Accreditation No. 2735) · Report 9457.5.

National (Head Office)
T 1300 00 KORB (5672)
E info@korb.au

Melbourne
17 Anderson Road,
Thornbury VIC 3071

Adelaide
71 Maria Street, Thebarton
SA 5031

Perth
U4/4 McNeece Place,
O'Connor WA 6163

Korb Pty Ltd
ABN 26 159 533 454